


PP-FR ext. fire retardant sheet / grey (RAL 7037)

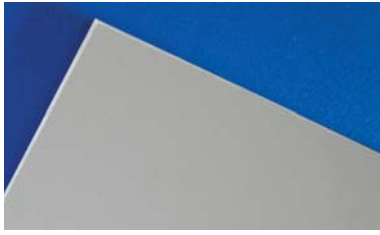

Fire retardant extruded polypropylene (PP-FR) is offered in a smooth finish to grey RAL 7037. PP-FR has a V2 fire rating according to UL94 making it the ideal choice whenever high chemical and thermal resistance is required, in conjunction with low flammability.

Thickness (mm)	2440 x 1220mm		3000 x 1500mm		4000 x 2000mm	
	kg/ea	£/ea	kg/ea	£/ea	kg/ea	£/ea
3	8.14	95.32	12.29	143.92	22.08	258.56
4.5	12.21	142.98	18.44	215.93*	33.10	387.60
6	16.28	190.64	24.59	287.95	44.16	517.11
8	-	-	32.76	383.62	58.88	689.48
9	24.42	285.96	36.87	431.75	-	-
10	-	-	41.40	484.79	73.60	861.86
12	32.56	381.28	49.17	575.78	88.32	1034.23
15	-	-	62.10	727.19	110.40	1292.78
20	-	-	82.80	969.59	147.20	1723.71
25	-	-	103.50	1211.99	184.00	2154.64
30	-	-	124.20	1454.38	220.80	2585.57

All products are ex-stock unless in grey, availability on application
2000 x 1000mm is also available
*4mm

PP-FR ext. weld rod / grey (RAL 7037)



PP-FR extruded weld rod is available in grey RAL 7037 to match the sheet. Supplied in 3mm round as standard, other profiles are also available on request.

COILS (2-3kg)	£/kg
● 3mm	20.40

Other profiles available on application

bespoke machining

25,000 sqft dedicated to the very latest in bespoke machining.
Efficient, fast-turnaround service with consistent high quality results.



All prices shown accurate at time of production and subject to change without prior notice. Please contact us for further information.